


Magnetic track lighting system

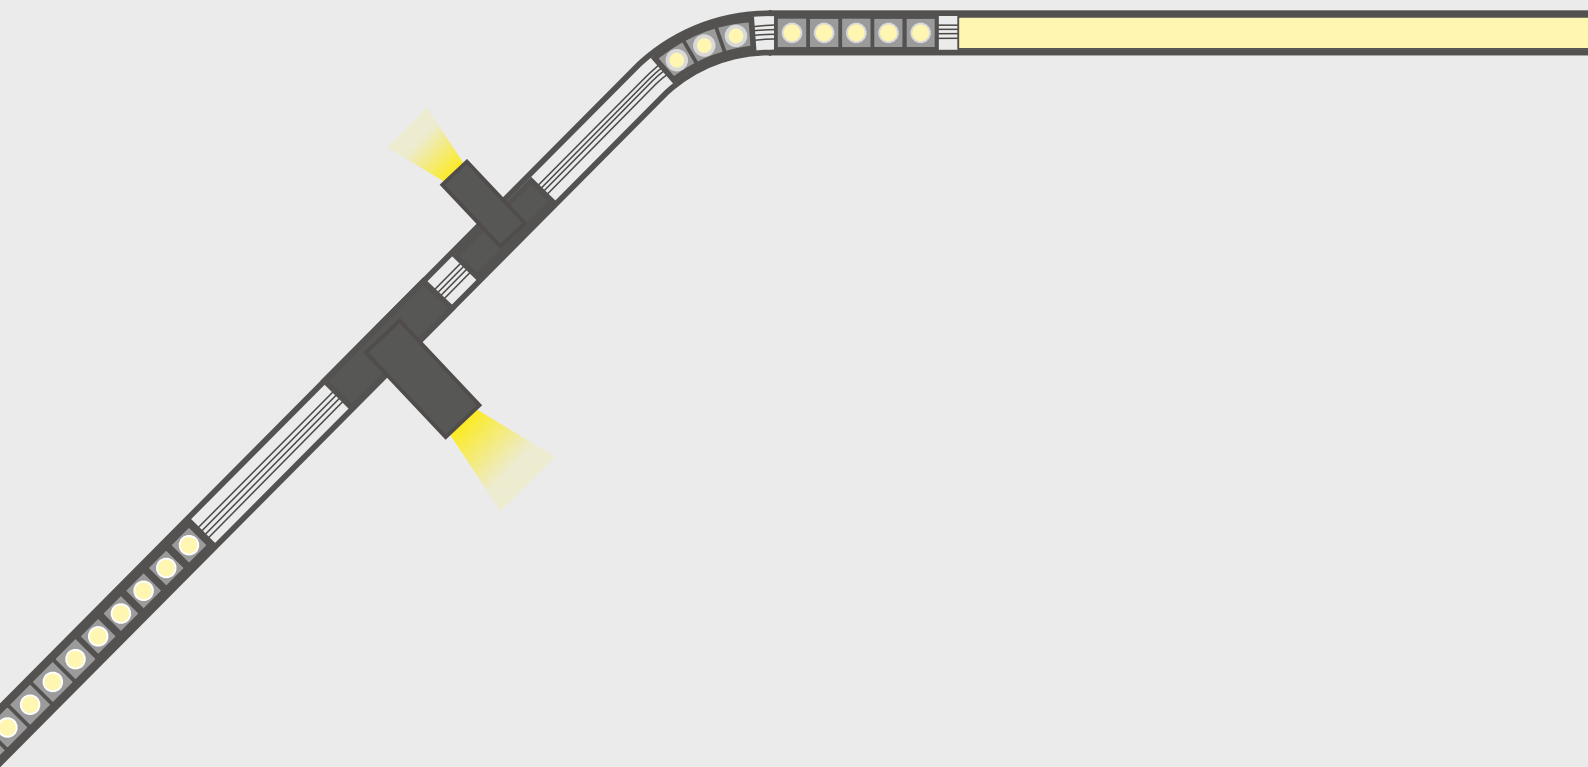


MAGNETIC
Track Lighting System

Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

NdFeB N35 rare-earth permanent magnet,
3600 (+-10%) Gauss

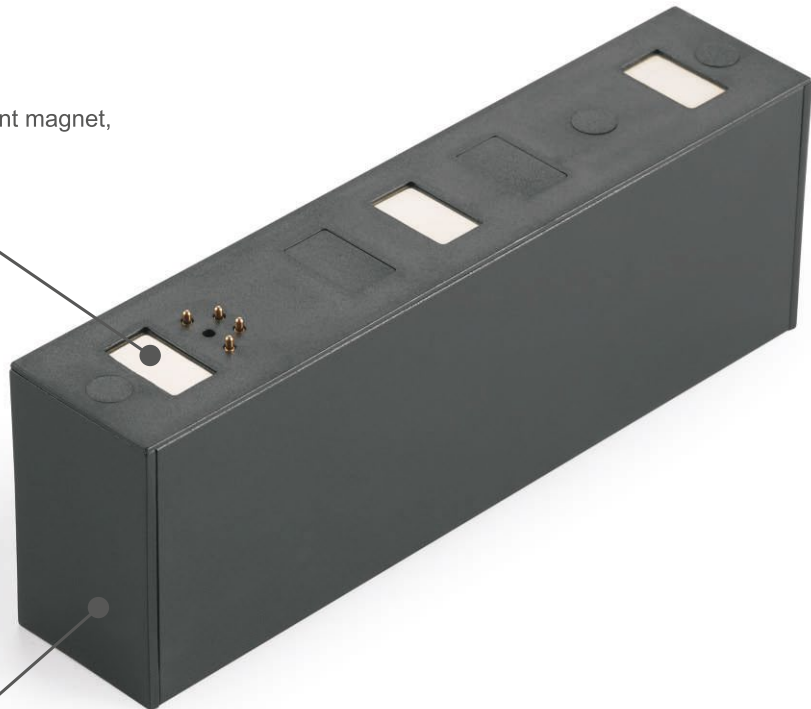


Excellent powder coating

Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

Research & Developments

We are constantly searching & testing technologies to offer the best natural lighting in our fixtures.

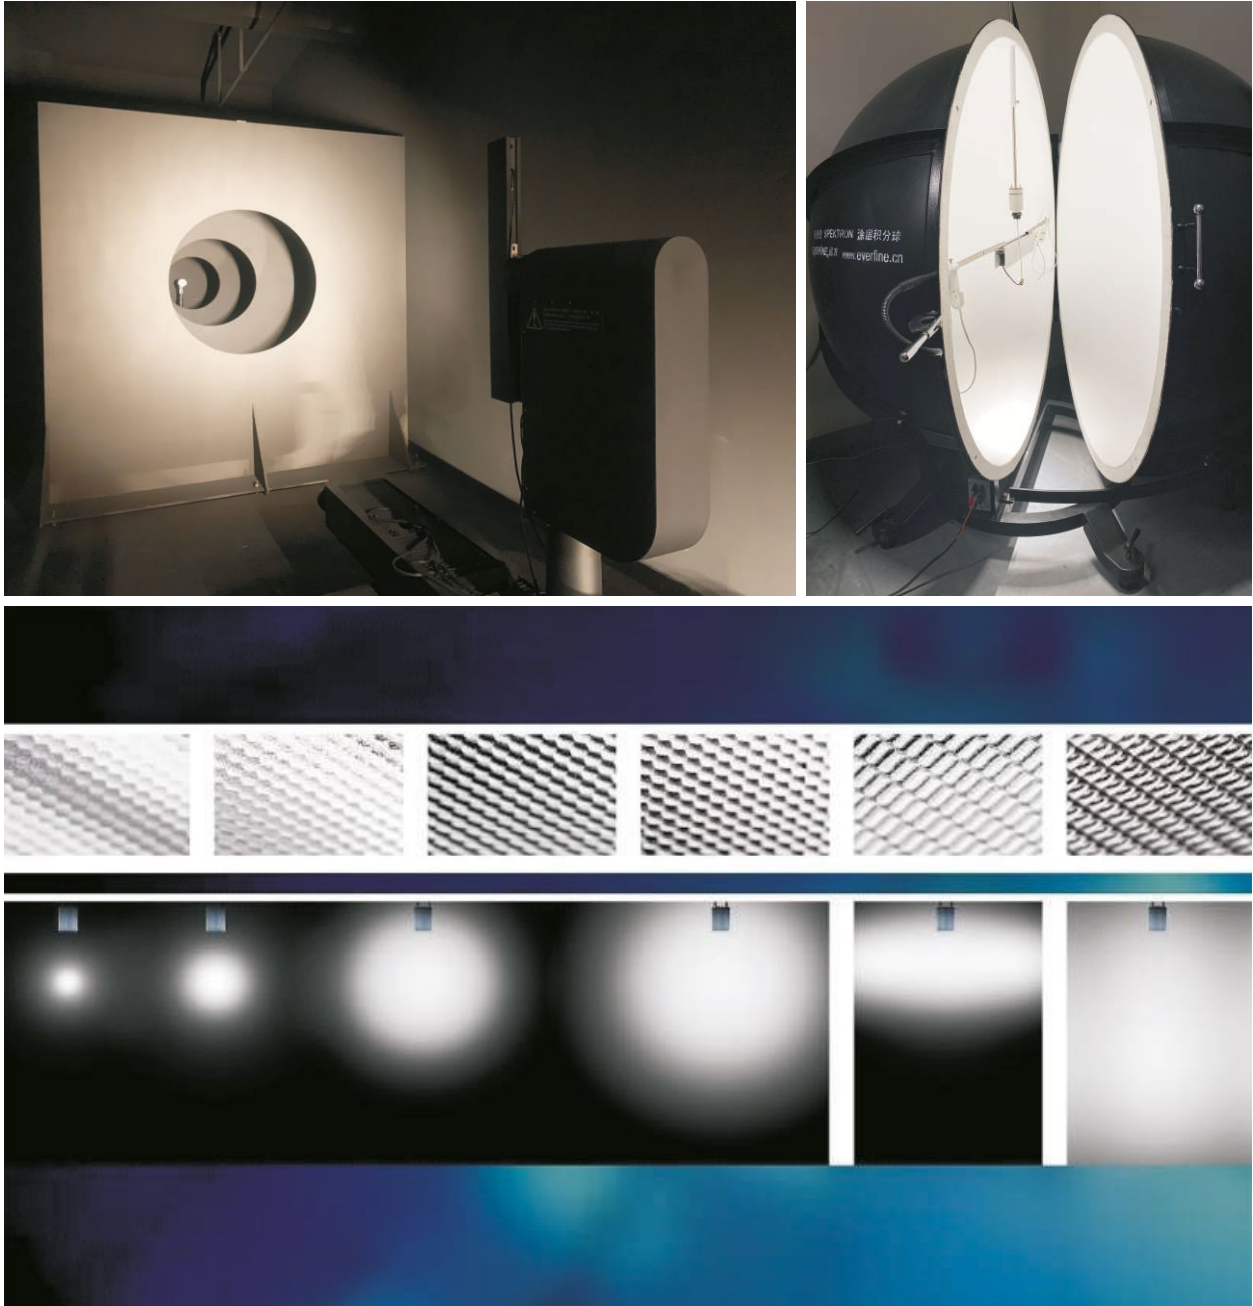



Thanks to the convenient structure our systems are used in various spaces from commercial to residential settings.


MAGNETIC
Track Lighting System

TWO DESIGNS


Two sizes of magnetic system to fit all your spaces.

The 39 mm tracks offer lighting fixtures that have higher power & luminance to fit spaces with higher ceilings.

The 27.5 mm tracks are our newest slimmer editions offering seamless designs that look great in residential spaces.




39mm



27.5mm

Two input voltages:

DC24V / DC48V

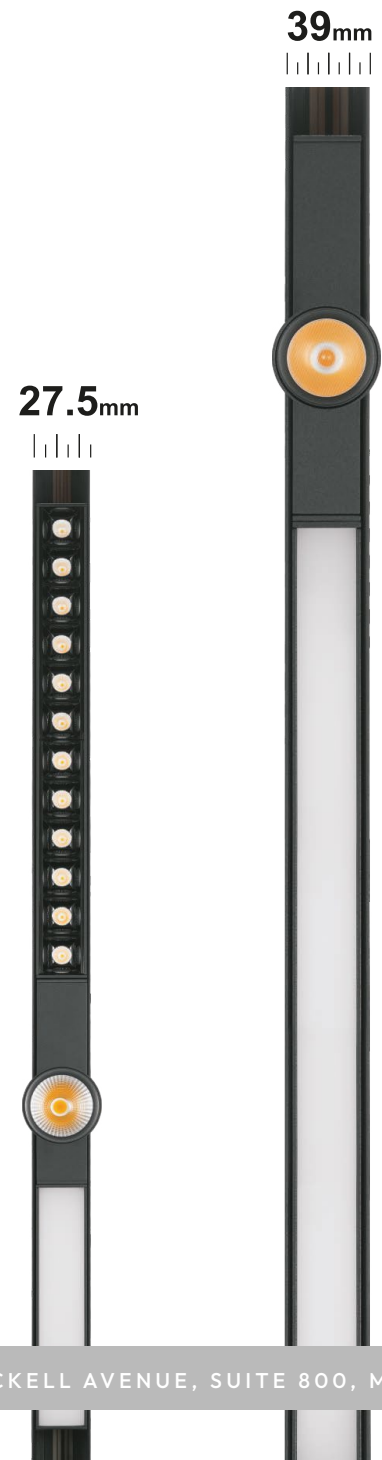

MAGNETIC
Track Lighting System | Multi-functional installation

27.5 mm

39 mm

27.5 mm

Various Installations:

surface/recessed/pendant



Black



White




Golden



Black bronze

MAGNETIC
Track Lighting System | Multi-functional installation

39 mm

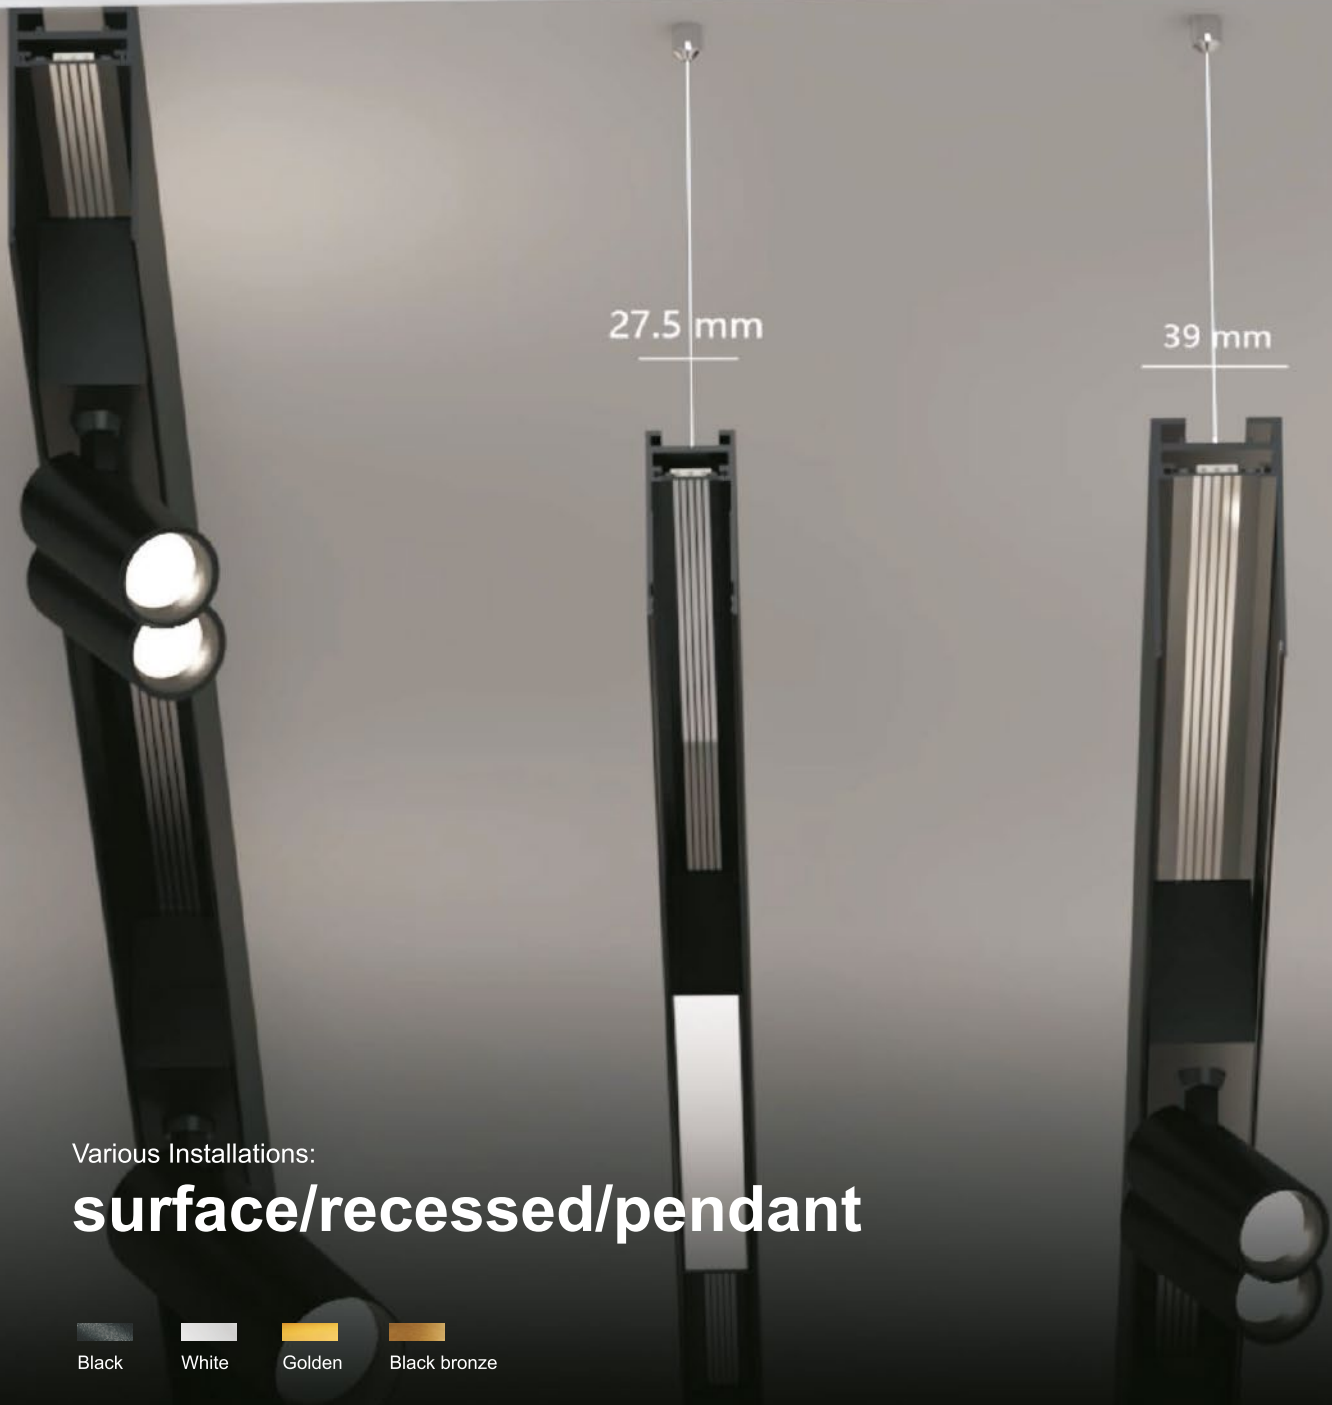



Various Installations:


surface/recessed/pendant

- Black
- White
- Golden
- Black bronze

MAGNETIC
Track Lighting System Track connection

Seamless connection

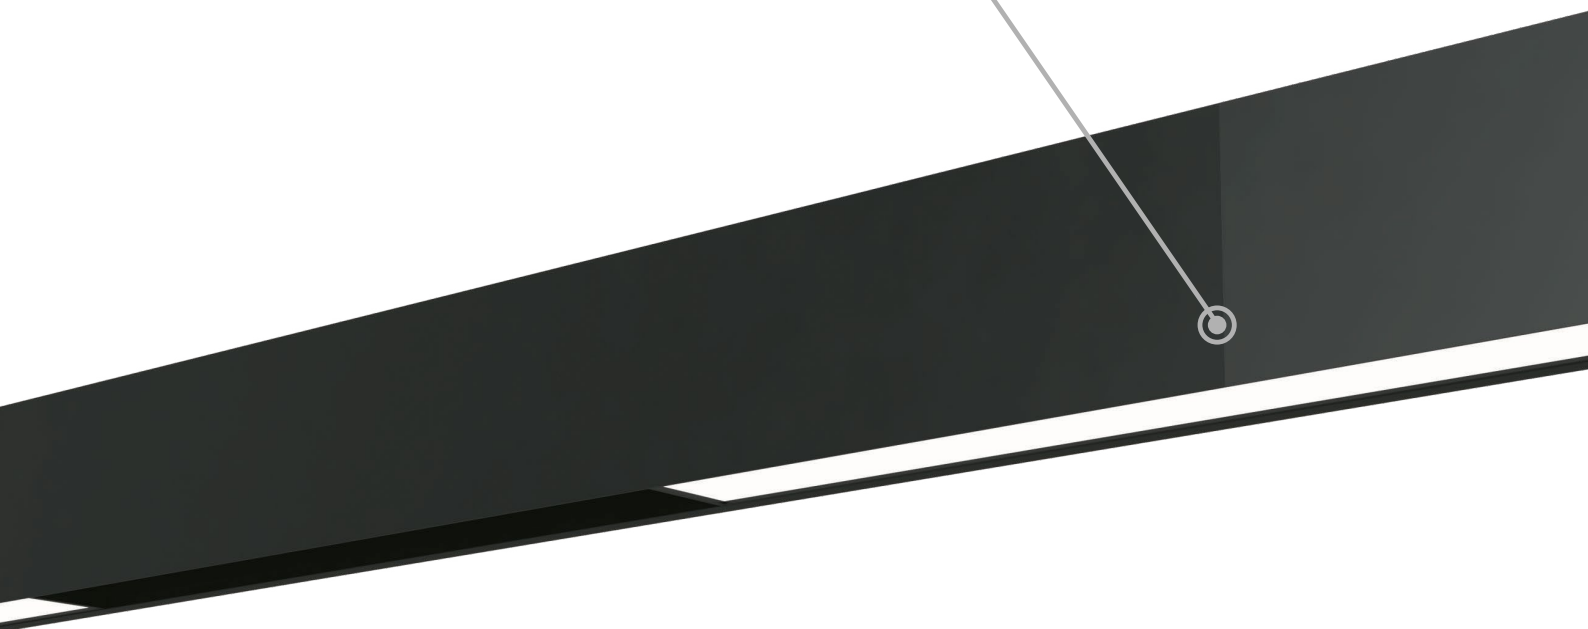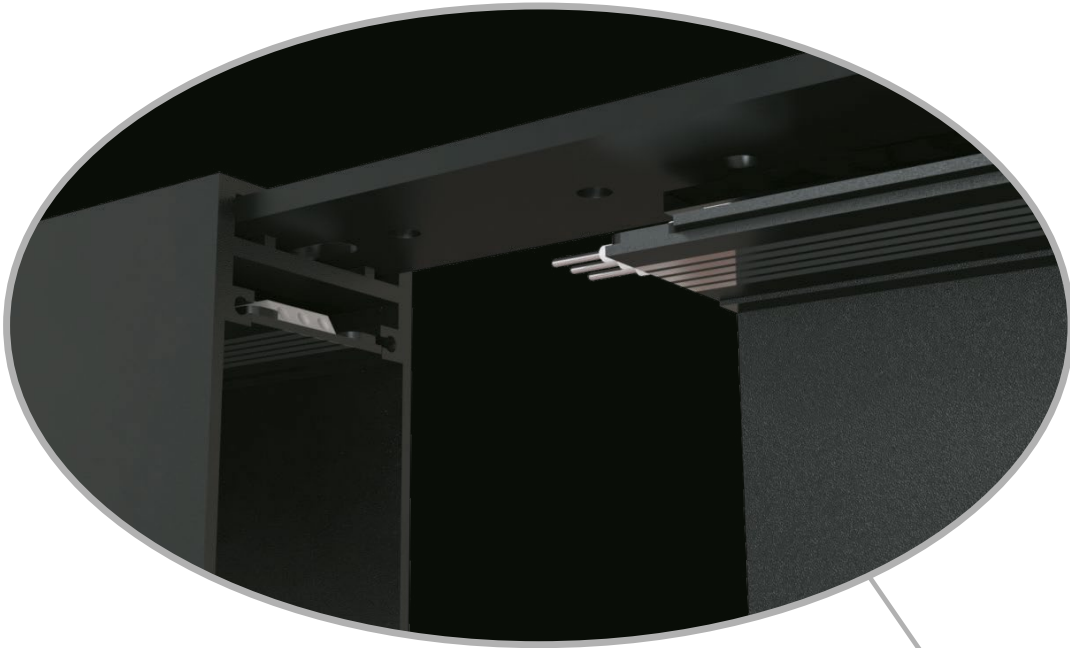

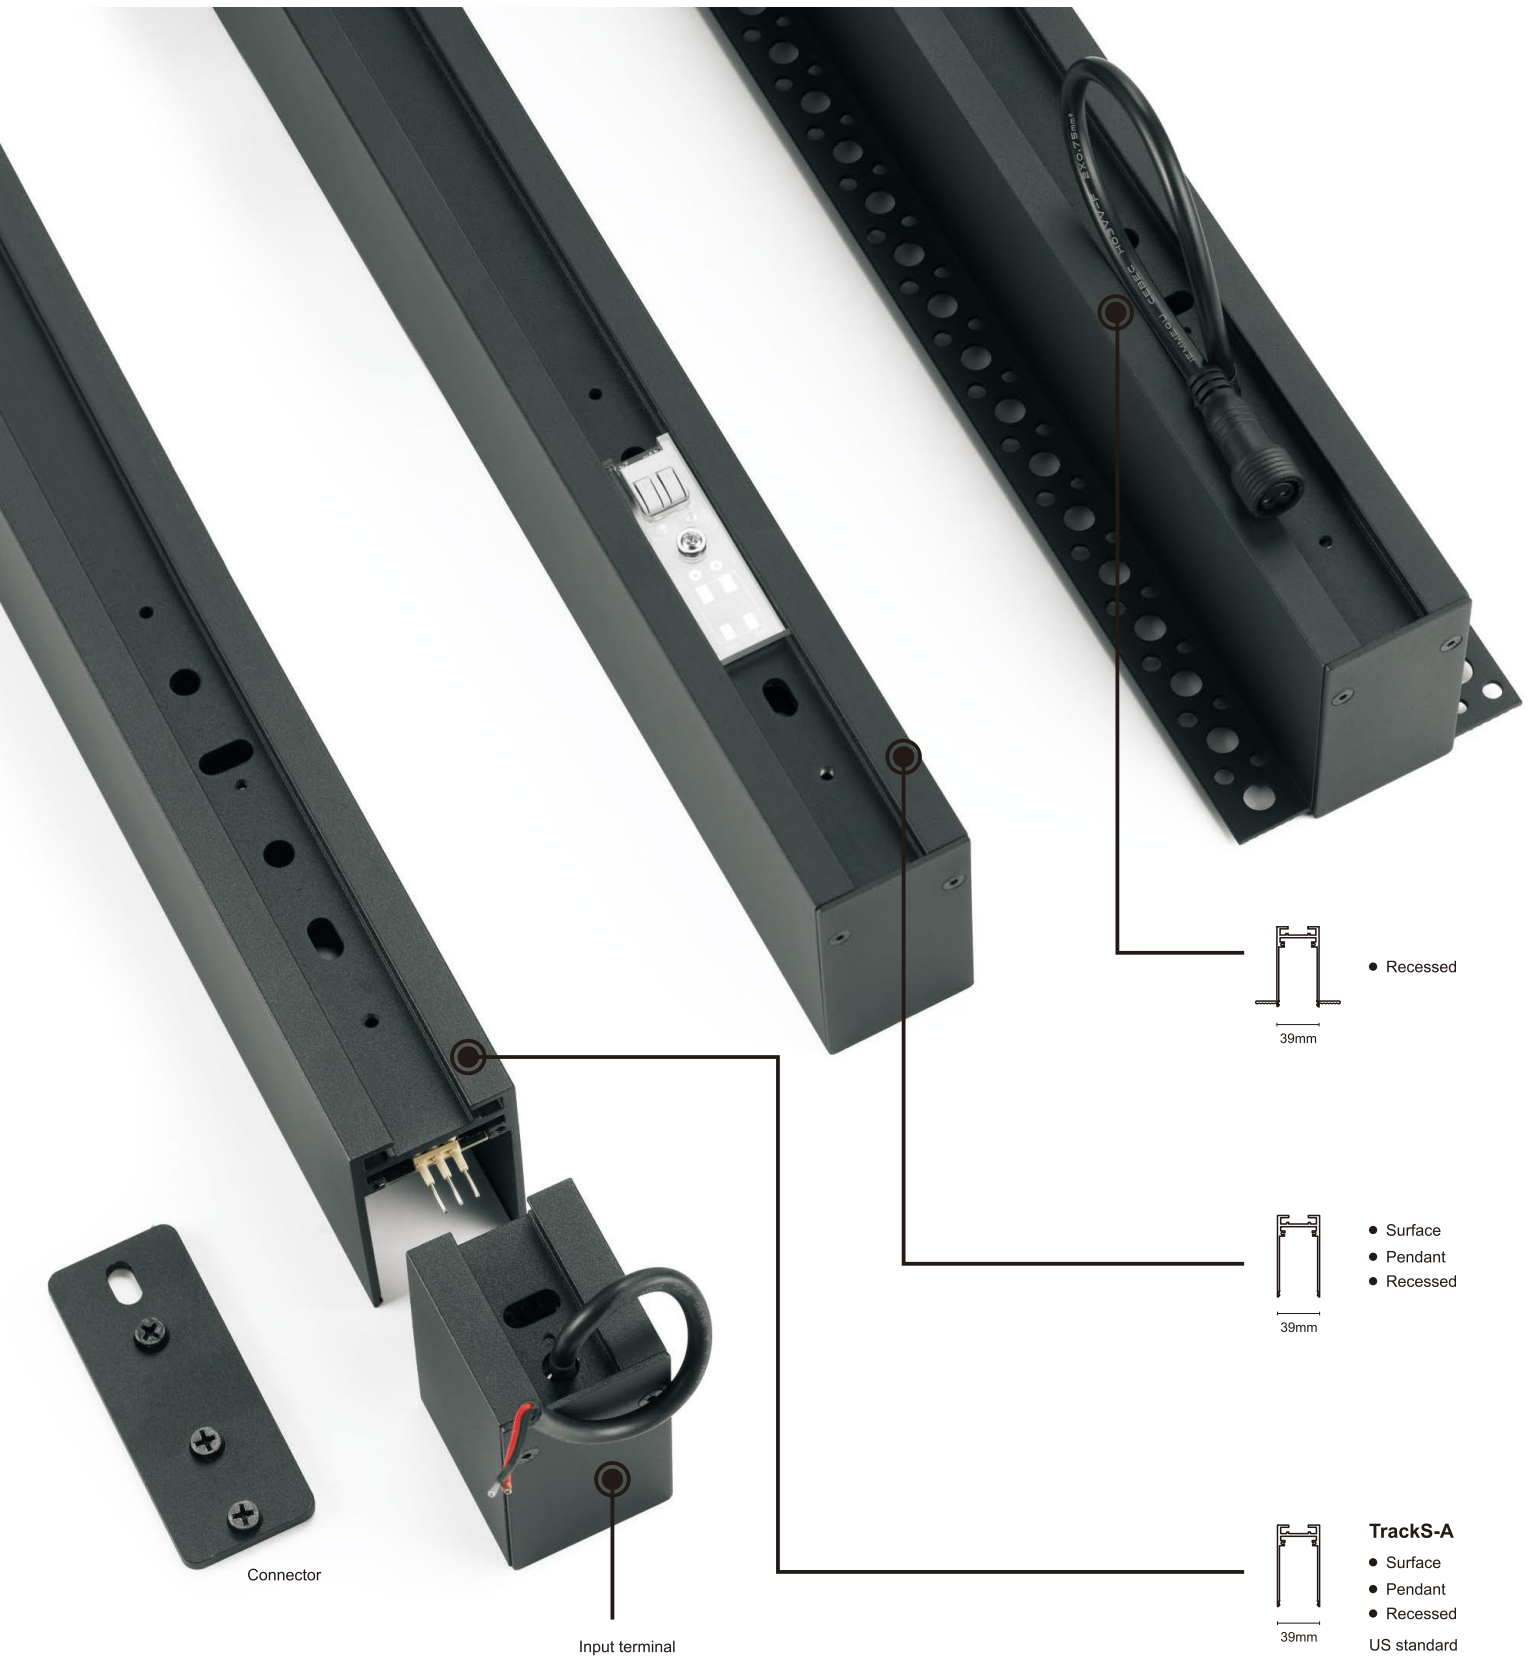

Connector

Input terminal

• Recessed

• Surface
• Pendant
• Recessed

TrackS-A
• Surface
• Pendant
• Recessed

US standard
Intertek

STANDARD



series

STANDARD | Track series



Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm


Sandy Black
 Sandy White
 Golden
 Black bronze

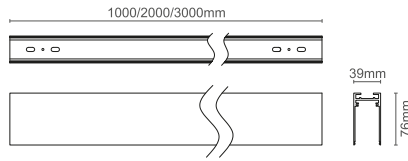

CORNER


L Corner

Sandy Black
 Sandy White




Inner Corner

Sandy Black
 Sandy White




Outer Corner

Sandy Black
 Sandy White




T corner

Sandy Black
 Sandy White

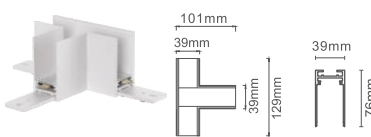


45D corner

Sandy Black
 Sandy White

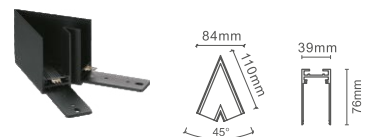

CROSS corner


Sandy Black
 Sandy White

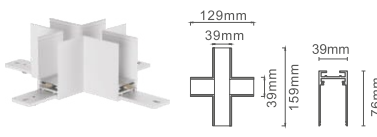

POWER FEED

Input terminal

Sandy Black
 Sandy White




STANDARD

Track series



Model	Power	Install	Length
1 Meter profile-R	200W max	Recessed	1000mm
2 Meter profile-R	200W max	Recessed	2000mm
3 Meter profile-R	200W max	Recessed	3000mm


■ Sandy Black □ Sandy White



CORNER


L Corner-R

■ Sandy Black □ Sandy White



Inner Corner-R

■ Sandy Black □ Sandy White




Outer Corner-R

■ Sandy Black □ Sandy White



T Corner-R


■ Sandy Black □ Sandy White



POWER FEED

Input terminal-R


■ Sandy Black □ Sandy White




STANDARD | Track series

ACCESSORIES


Pendant kit-A

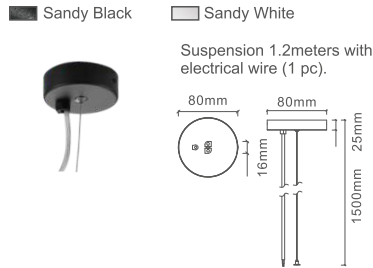


Pendant kit-B

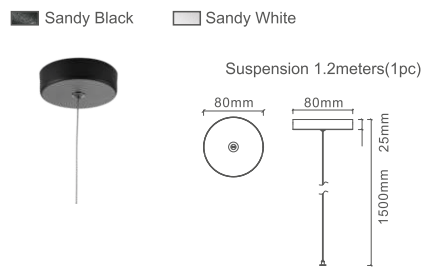


Pendant kit-C

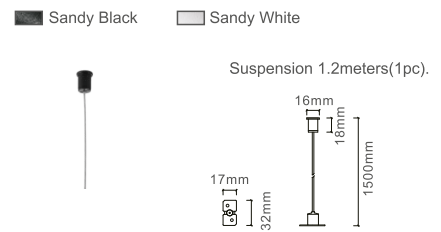


Track connector

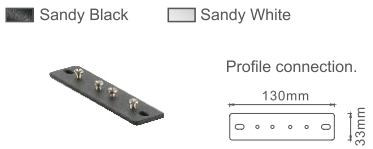


Power plate 65mm

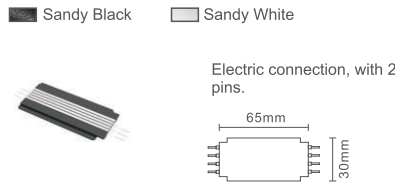


Pin

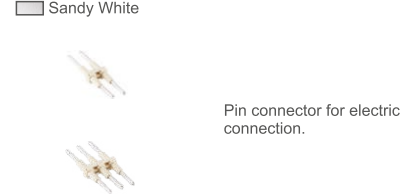


Track cover

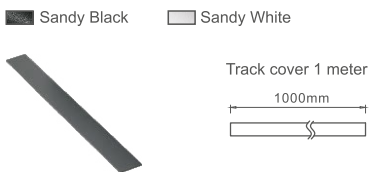


Track driver box

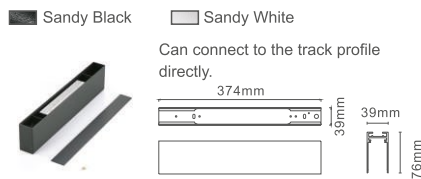

Driver box

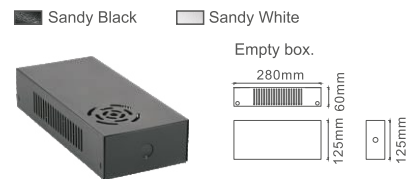


End cap

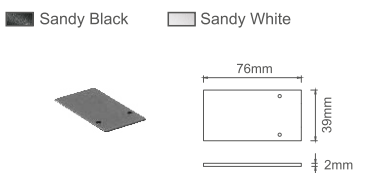

New surface mounted kits



Recessed kit

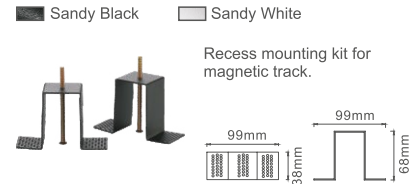

STANDARD | Dot series





DOT01



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 90	< 3	3000K	12°	126Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

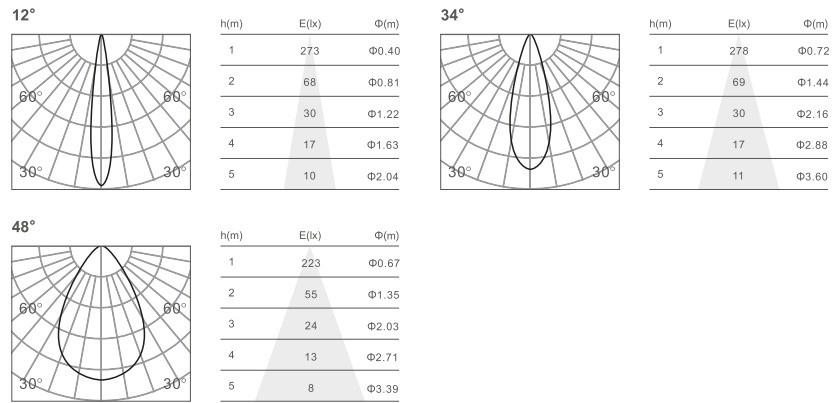



DOT03



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	12°	382Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

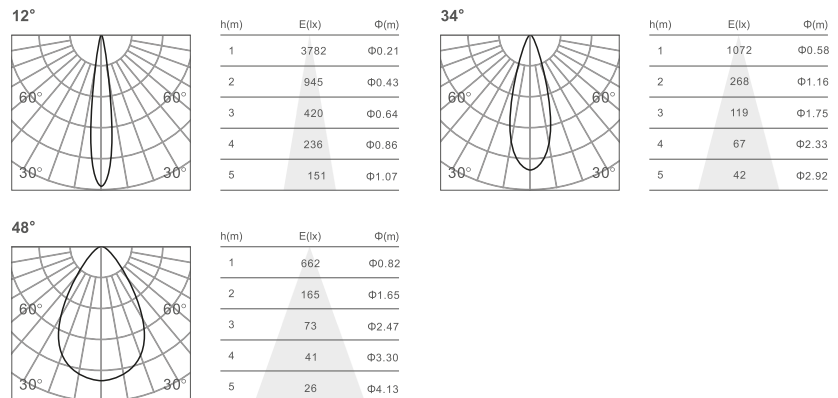

STANDARD | Dot series



DOT06





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	5723	Φ0.21
2	1431	Φ0.42
3	635	Φ0.63
4	357	Φ0.84
5	228	Φ1.05



h(m)	E(lx)	Φ(m)
1	1807	Φ0.63
2	451	Φ1.26
3	200	Φ1.89
4	112	Φ2.52
5	72	Φ3.15



h(m)	E(lx)	Φ(m)
1	1287	Φ0.79
2	321	Φ1.58
3	143	Φ2.37
4	80	Φ3.16
5	51	Φ3.95



DOT12





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06




h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95

STANDARD | Linear series




Linear08





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	223Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

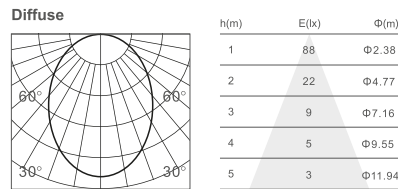


Linear16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	488Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

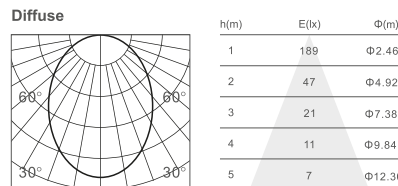

STANDARD | Linear series



Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	895Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	344	Φ2.47
2	86	Φ4.94
3	38	Φ7.41
4	21	Φ9.88
5	13	Φ12.35



Linear64




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1720Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	661	Φ2.47
2	165	Φ4.94
3	73	Φ7.41
4	41	Φ9.88
5	26	Φ12.36



STANDARD | Linear series




Linear96



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	2550Lm


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	962	Φ2.53
2	240	Φ5.06
3	107	Φ7.60
4	60	Φ10.13
5	38	Φ12.66

STANDARD | Fold series




Fold03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	12°	382Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

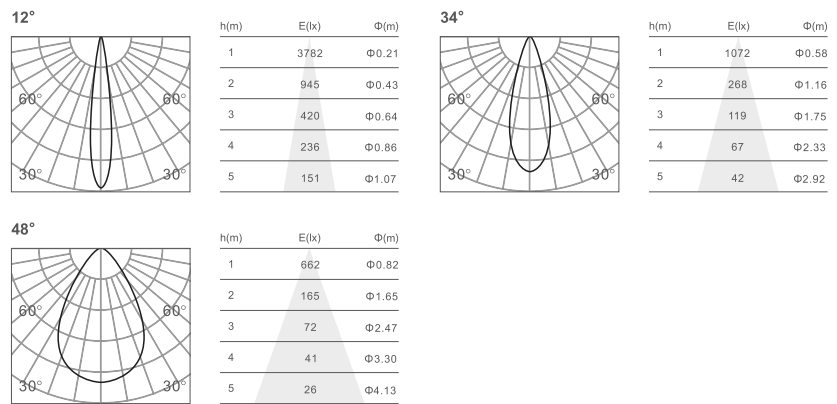


Fold06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	733Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

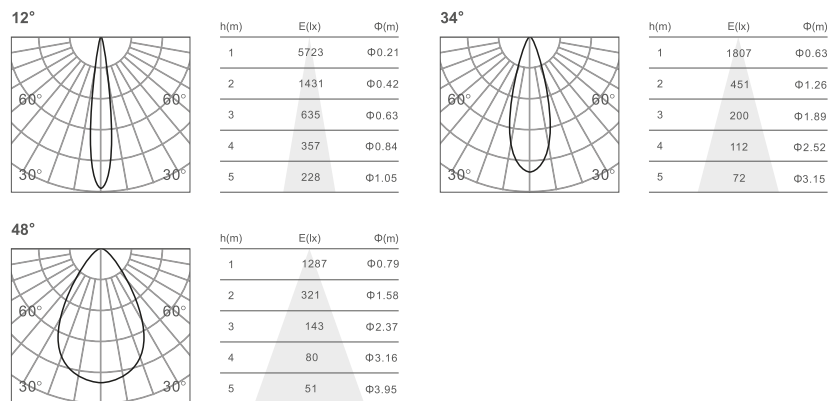

STANDARD | Fold series




Fold12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	12°	1440LM
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White




LIGHT DISTRIBUTION
3000K 90Ra



h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06



h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95

STANDARD | Fold series




Fold08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	223Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	88	Φ2.38
2	22	Φ4.77
3	9	Φ7.16
4	5	Φ9.55
5	3	Φ11.94




Fold16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	488Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	189	Φ2.46
2	47	Φ4.92
3	21	Φ7.38
4	11	Φ9.84
5	7	Φ12.30

STANDARD | Fold series




Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1270Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	487	Φ2.50
2	121	Φ5.01
3	54	Φ7.52
4	30	Φ10.02
5	19	Φ12.53



STANDARD | Wall washer series




Washer13




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90 > 80	< 3	3000K 2700K 4000K	wallwasher	480Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra



Wallwasher



h(m)	E(lx)	Φ(m)
1	324	Φ0.84
2	81	Φ1.68
3	36	Φ2.52
4	20	Φ3.36
5	12	Φ4.20




Washer27




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90 > 80	< 3	3000K 2700K 4000K	wallwasher	1055Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra



Wallwasher



h(m)	E(lx)	Φ(m)
1	704	Φ0.85
2	176	Φ1.70
3	78	Φ2.55
4	44	Φ3.40
5	28	Φ4.25

STANDARD | Out series




Out32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	895Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	344	Φ2.47
2	86	Φ4.94
3	38	Φ7.41
4	21	Φ9.88
5	13	Φ12.35




Out12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90 > 80	< 3	3000K 2700K 4000K	12° 34° 48°	1435Lm

■ Sandy Black □ Sandy White




LIGHT DISTRIBUTION
3000K 90Ra

12°




h(m)	E(lx)	Φ(m)
1	11430	Φ0.21
2	2857	Φ0.42
3	1270	Φ0.63
4	714	Φ0.85
5	457	Φ1.06

34°




h(m)	E(lx)	Φ(m)
1	3545	Φ0.62
2	886	Φ1.25
3	393	Φ1.88
4	221	Φ2.51
5	141	Φ3.14

48°



h(m)	E(lx)	Φ(m)
1	2773	Φ0.79
2	693	Φ1.58
3	308	Φ2.37
4	173	Φ3.16
5	110	Φ3.95

3 wires track rail

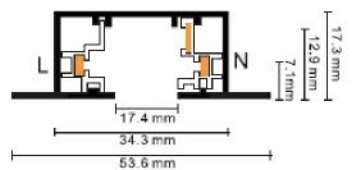

3 wires length: 1000mm, 1500mm, 2000mm, 3000mm.



H-type length: 2ft, 4ft, 6ft, 8ft

Installation way, surface mounted/pendant.

We have special recessed type.



4 wires track system

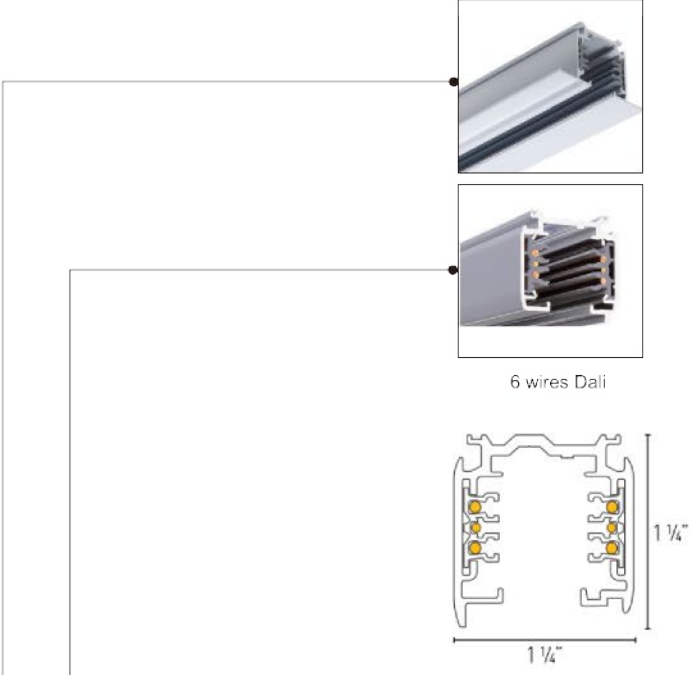

3 wires length: 1000mm, 1500mm, 2000mm, 3000mm.

Installation way, surface mounted/pendant.



We have special recessed type.

We have 6 wires Dali track rail too.



MINI | Track series

MINI
series

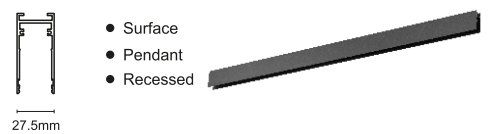
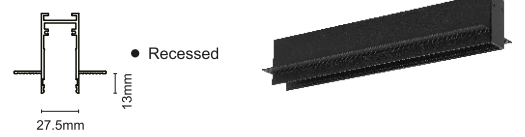


MINI | Track series



Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm


Sandy Black
 Sandy White
 Golden
 Black bronze

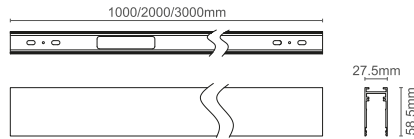

CORNER


L corner-s

Sandy Black
 Sandy White

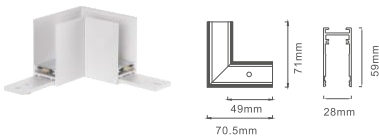


Inner corner-s

Sandy Black
 Sandy White

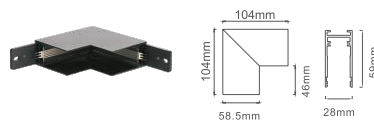


Outer corner-s

Sandy Black
 Sandy White




T corner-s

Sandy Black
 Sandy White




45D corner-s

Sandy Black
 Sandy White

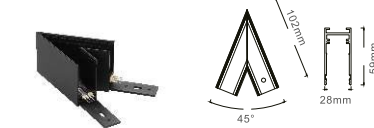

Cross corner-s

Sandy Black
 Sandy White

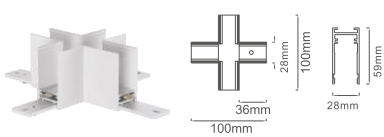


MINI | Track series



Model	Power	Install	Length
1 Meter profile-R-s	200W max	Recessed	1000mm
2 Meter profile-R-s	200W max	Recessed	2000mm
3 Meter profile-R-s	200W max	Recessed	3000mm


■ Sandy Black □ Sandy White



CORNER


L corner-R-s

■ Sandy Black □ Sandy White




Inner corner-R-s

■ Sandy Black □ Sandy White

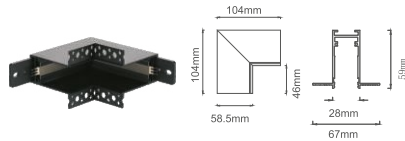


Outer corner-R-s

■ Sandy Black □ Sandy White

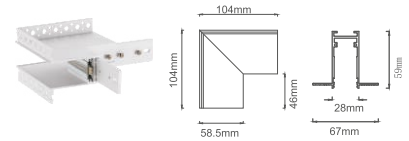

T corner-R-s

■ Sandy Black □ Sandy White

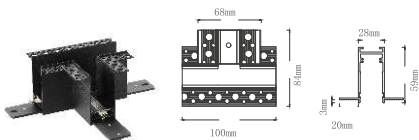


MINI | Track series



Model	Power	Install	Length
1 Meter profile-M-s	200W max	Recessed	1000mm
2 Meter profile-M-s	200W max	Recessed	2000mm
3 Meter profile-M-s	200W max	Recessed	3000mm


■ Sandy Black □ Sandy White

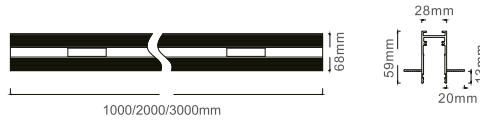

CORNER


L Corner-M-s

■ Sandy Black □ Sandy White




Inner Corner-M-s

■ Sandy Black □ Sandy White

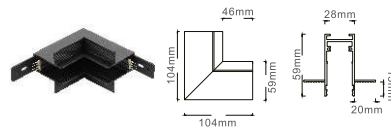

Outer Corner-M-s

■ Sandy Black □ Sandy White



MINI | Dot series



Dot06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 90	< 3	3000K	20°	510Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra




15°




h(m)	E(lx)	Φ(m)
1	2563	Φ0.37
2	640	Φ0.74
3	284	Φ0.92
4	160	Φ1.236
5	102	Φ15.4

34°



h(m)	E(lx)	Φ(m)
1	1863	Φ0.43
2	465	Φ0.87
3	207	Φ1.31
4	116	Φ1.75
5	74	Φ2.19

48°



h(m)	E(lx)	Φ(m)
1	1139	Φ0.37
2	284	Φ0.74
3	126	Φ1.12
4	71	Φ1.49
5	45	Φ1.86



Dot12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90	< 3	3000K	20°	1020Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra




20°




h(m)	E(lx)	Φ(m)
1	5542	Φ0.36
2	1386	Φ0.72
3	615	Φ1.08
4	346	Φ1.44
5	221	Φ1.80

34°




h(m)	E(lx)	Φ(m)
1	3794	Φ0.36
2	948	Φ0.72
3	421	Φ1.08
4	237	Φ1.44
5	151	Φ1.80

48°



h(m)	E(lx)	Φ(m)
1	2258	Φ0.65
2	564	Φ1.31
3	250	Φ1.97
4	141	Φ2.63
5	90	Φ3.29

MINI | Dot series



Dot24-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 90	< 3	3000K	20°	1875Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	101121	Φ0.36
2	2528	Φ0.73
3	1124	Φ1.10
4	632	Φ1.47
5	404	Φ1.84



h(m)	E(lx)	Φ(m)
1	7111	Φ0.42
2	1778	Φ0.85
3	790	Φ1.28
4	444	Φ1.71
5	284	Φ2.14



h(m)	E(lx)	Φ(m)
1	4057	Φ0.65
2	1014	Φ1.30
3	450	Φ1.96
4	253	Φ2.61
5	162	Φ3.27

MINI | Linear series




Linear10-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	230Lm


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E lx	Φ(m)
1	88	Φ2.37
2	22	Φ4.74
3	9	Φ7.12
4	5	Φ9.49
5	3	Φ11.86




Linear20-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	605Lm


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E lx	Φ(m)
1	239	Φ2.35
2	59	Φ4.70
3	26	Φ7.05
4	14	Φ9.40
5	9	Φ11.75

MINI | Linear series



Linear40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1015Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	388	Φ2,47
2	97	Φ4,95
3	43	Φ7,43
4	24	Φ9,91
5	15	Φ12,38



Linear80-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1970Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	773	Φ2,42
2	193	Φ4,85
3	85	Φ7,27
4	48	Φ9,70
5	30	Φ12,12



MINI | Linear series



MINI | Fold series




Fold06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	20°	685Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

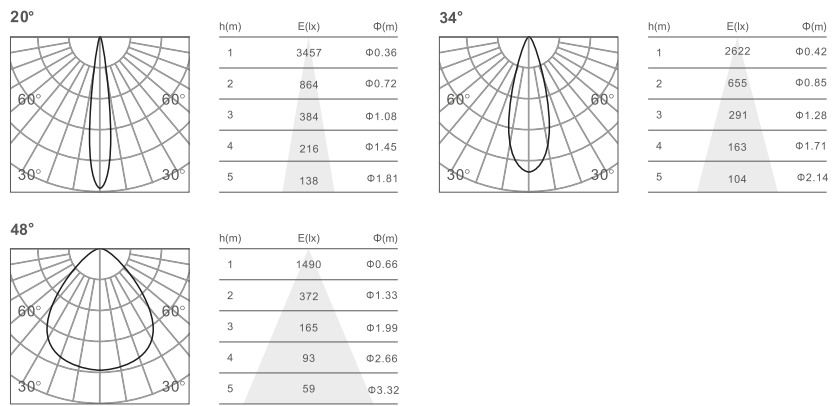


Fold12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90	< 3	3000K	20°	1150Lm
	> 80		2700K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

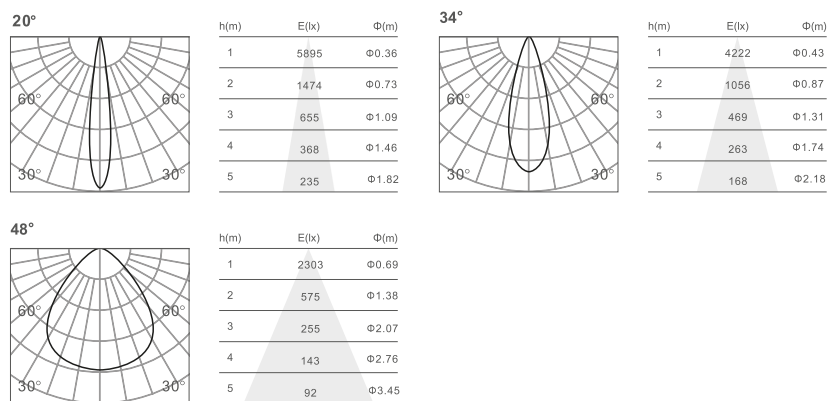

MINI | Fold series




Fold10-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	625Lm


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	167	Φ2.42
2	41	Φ4.84
3	18	Φ7.26
4	10	Φ9.68
5	6	Φ12.10




Fold20-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	990Lm


■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION


3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	388	Φ2.43
2	97	Φ4.87
3	43	Φ7.31
4	24	Φ9.75
5	15	Φ12.19

MINI | Out series



Out12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1040Lm


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra




20°




h(m)	E(lx)	Φ(m)
1	5542	Φ0.36
2	1386	Φ0.72
3	615	Φ1.08
4	346	Φ1.44
5	221	Φ1.80

34°



h(m)	E(lx)	Φ(m)
1	3794	Φ0.43
2	948	Φ0.87
3	421	Φ1.31
4	237	Φ1.75
5	151	Φ2.18

48°



h(m)	E(lx)	Φ(m)
1	2258	Φ0.65
2	564	Φ1.31
3	250	Φ1.97
4	141	Φ2.63
5	90	Φ3.29



Out40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1015Lm


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION

3000K 90Ra



Diffuse



h(m)	E(lx)	Φ(m)
1	388	Φ2.47
2	97	Φ4.95
3	43	Φ7.43
4	24	Φ9.91
5	15	Φ12.38

MINI | wallwasher series



Wallsher20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	750Lm



■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	403	Φ0.82
2	101	Φ1.64
3	44	Φ2.46
4	25	Φ3.28
5	16	Φ4.10



Wallsher30-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1140Lm


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra


Diffuse





h(m)	E(lx)	Φ(m)
1	595	Φ0.85
2	149	Φ1.70
3	66	Φ2.56
4	37	Φ3.41
5	23	Φ4.27



Dual-Track | Track series

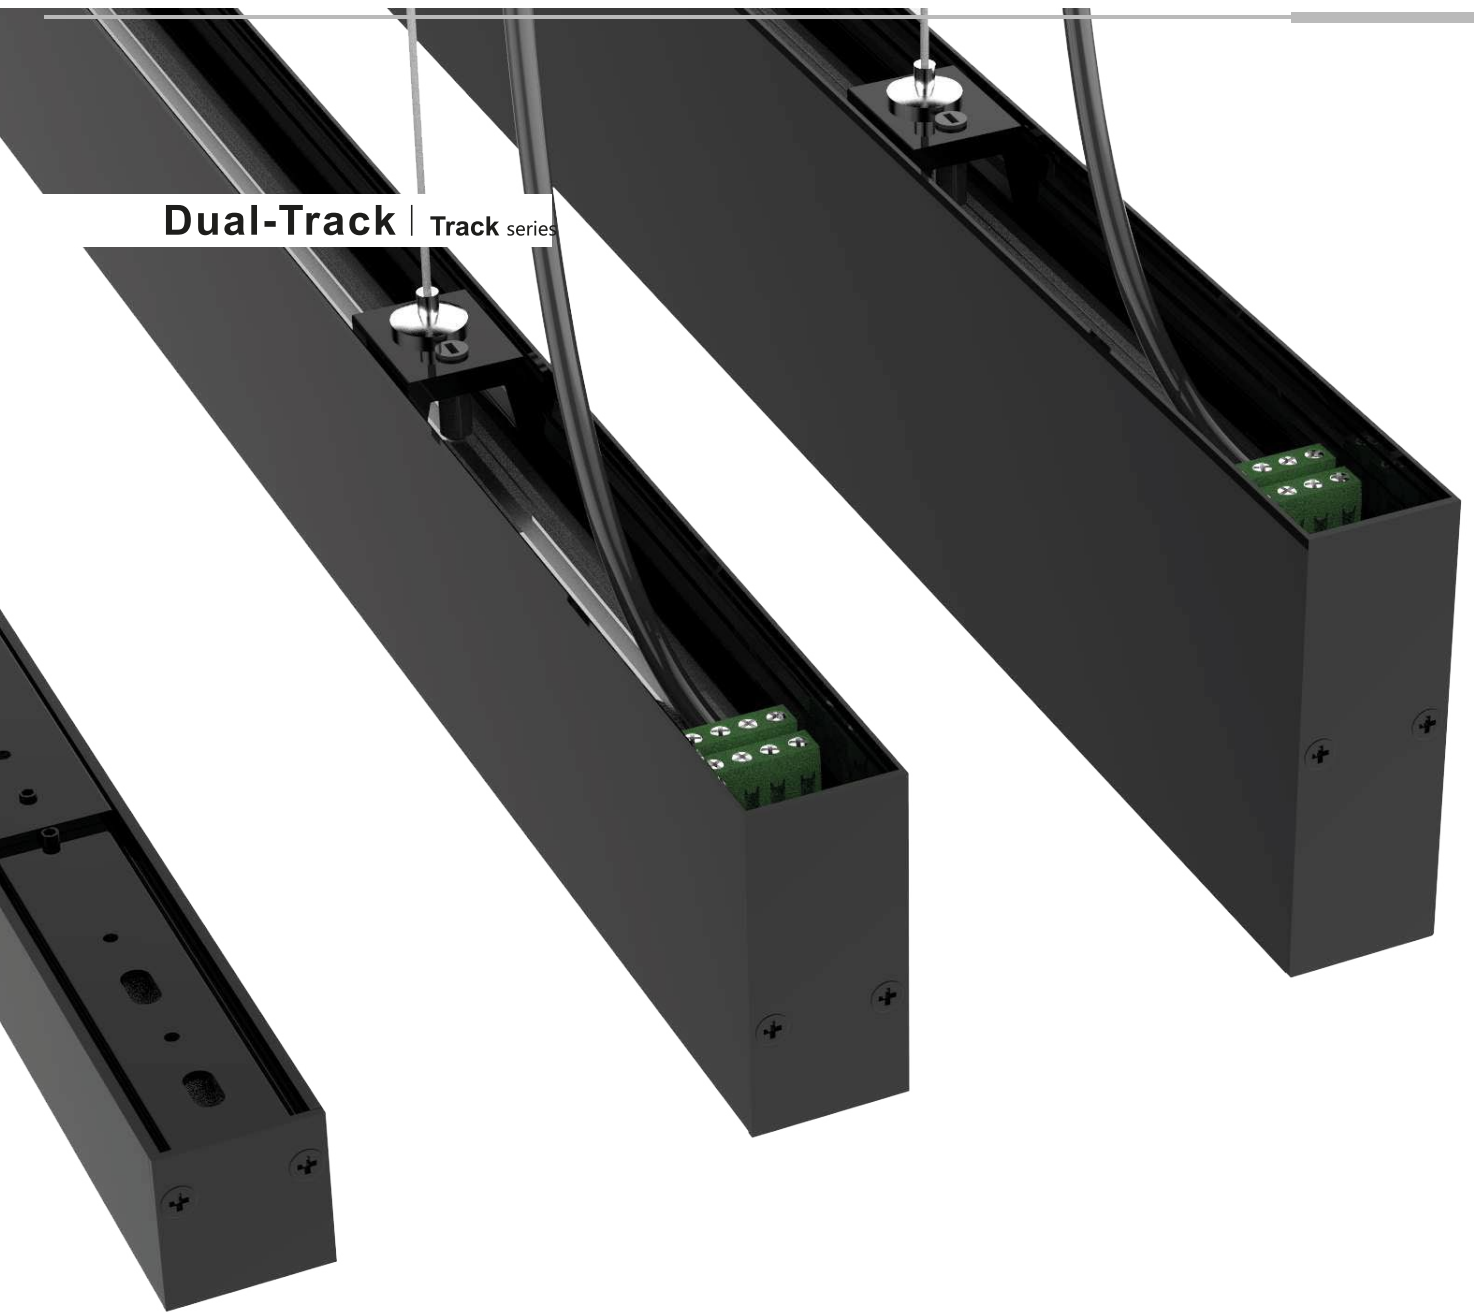

**ULTRA SLIM/
DUAL TRACK**
series

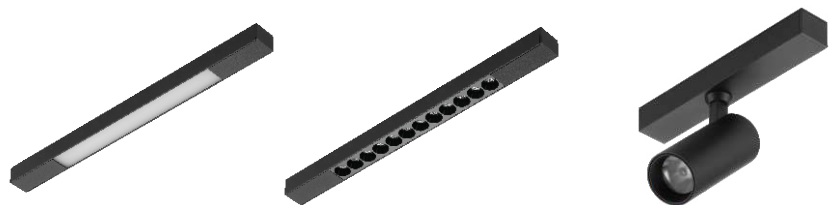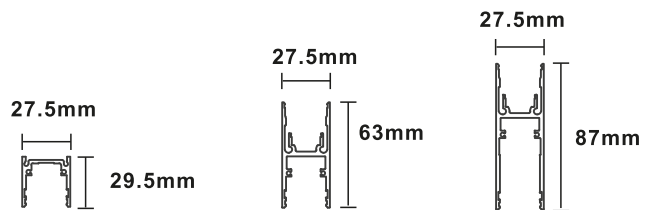

Dual-Track | Track_{series}





The Dual-track with a combination of direct lighting and indirect lighting which is popular in residential and commercial projects or offices

Dual-Track | Track series





Model	Power	Install	Length
1 Meter profile-DT63	200W max	Pendant	1000mm
2 Meter profile-DT63	200W max	Pendant	2000mm
3 Meter profile-DT63	200W max	Pendant	3000mm

Sandy Black
 Sandy White
 Golden
 Black bronze

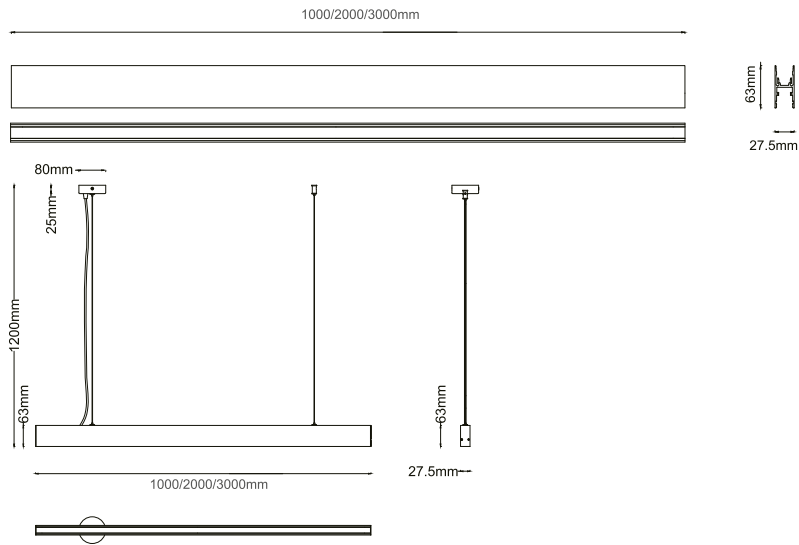


Model	Power	Install	Length
1 Meter profile-DT87	200W max	Pendant	1000mm
2 Meter profile-DT87	200W max	Pendant	2000mm
3 Meter profile-DT87	200W max	Pendant	3000mm

Sandy Black
 Sandy White
 Golden
 Black bronze

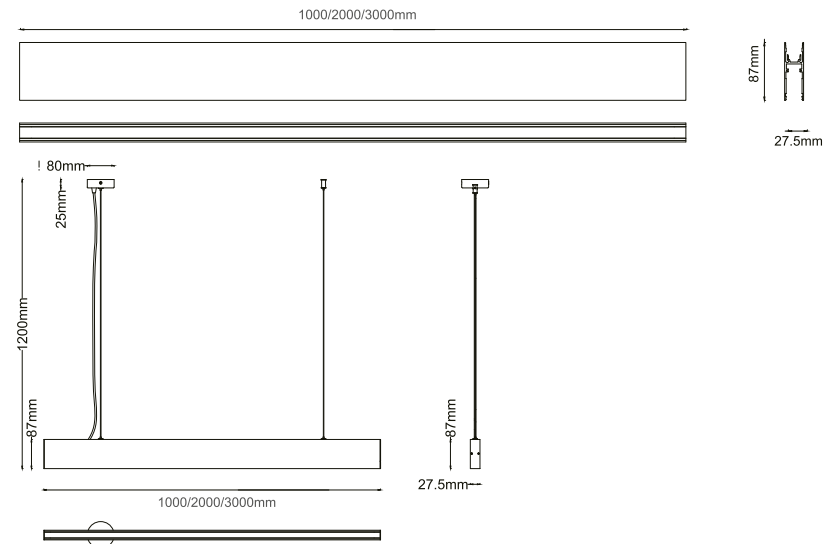


ULTRA SLIM | Track series




Model	Power	Install	Length
1 Meter profile-uls	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile-uls	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile-uls	200W max	Surface/Pendant/Recessed	3000mm

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

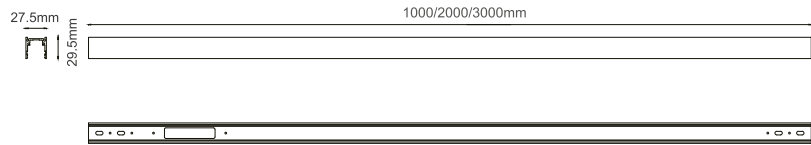

Model	Power	Install	Length
1 Meter profile-R-uls	200W max	Recessed	1000mm
2 Meter profile-R-uls	200W max	Recessed	2000mm
3 Meter profile-R-uls	200W max	Recessed	3000mm

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze



ULTRA SLIM | Dot series



Dot12-uls




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90 > 80	< 3	3000K 2700K 4000K	25°	1006Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(k)	Φ(m)
1	3692	Φ0.44
2	922	Φ0.88
3	410	Φ1.32
4	230	Φ1.76
5	147	Φ2.21

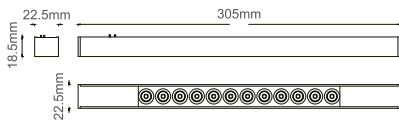

Dot24-uls




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 90 > 80	< 3	3000K 2700K 4000K	25°	1875Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(k)	Φ(m)
1	7111	Φ0.42
2	1778	Φ0.85
3	790	Φ1.28
4	444	Φ1.71
5	284	Φ2.14

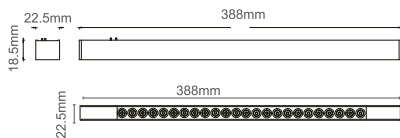

ULTRA SLIM | Linear series




Linear30-uls




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	433Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

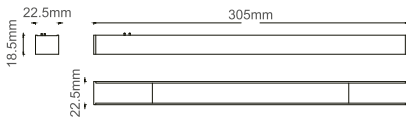

Diffuse



h(m)	E(lx)	Φ(m)
1	168	Φ2.44
2	42	Φ4.88
3	18	Φ7.32
4	10	Φ9.76
5	6	Φ12.20




Linear70-uls




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1148Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 90Ra

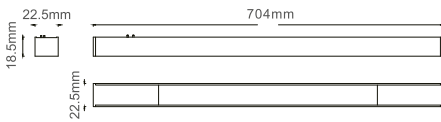


Diffuse



h(m)	E(lx)	Φ(m)
1	442	Φ2.45
2	110	Φ4.91
3	49	Φ7.37
4	27	Φ9.83
5	17	Φ12.29

ULTRA SLIM | Linear series



Linear50-uls




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	890Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	342	Φ2.46
2	85	Φ4.93
3	38	Φ7.40
4	21	Φ9.87
5	13	Φ13.24



Linear90-uls




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	1489Lm

■ Sandy Black □ Sandy White


LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	575	Φ2.42
2	143	Φ4.85
3	63	Φ7.28
4	35	Φ9.71
5	23	Φ12.14



CURVY | CircleTrack series



CURVY MAGNETIC SYSTEM

With the brand new track addition
The curvy system bring you more inspiration



Full



1/2



1/4



1/8



Creative design



Creative design



Creative design



Pendant



Surface



Recessed

STANDARD CURVY | CircleTrack series





Curvy Full-D9



Power **200W max** Install **Surface/Pendant/Recessed**

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

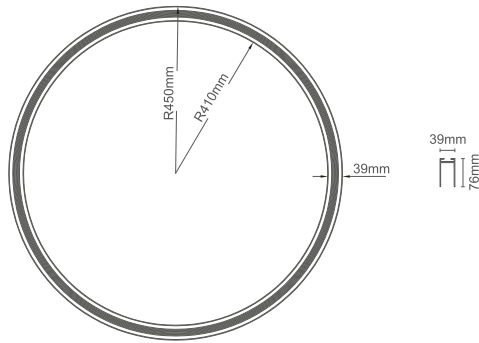



Curvy 1/2-D9



Power **200W max** Install **Surface/Pendant/Recessed**

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

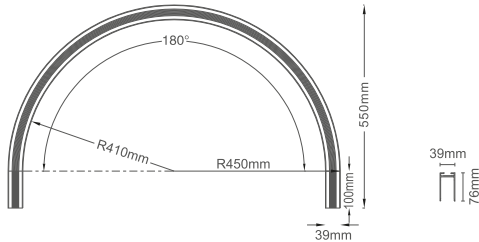

STANDARD CURVY | CircleTrack series





Curvy 1/4-D9



Power **200W max** Install **Surface/Pendant/Recessed**

Sandy Black
 Sandy White
 Golden
 Black bronze





Curvy 1/8-D9



Power **200W max** Install **Surface/Pendant/Recessed**

Sandy Black
 Sandy White
 Golden
 Black bronze



STANDARD CURVY | Dot series



Dot03-D9





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 90	< 3	3000K	12°	300Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	2963	Φ0.16
2	740	Φ0.33
3	329	Φ0.55
4	185	Φ0.66
5	118	Φ0.83



h(m)	E(lx)	Φ(m)
1	895	Φ0.56
2	223	Φ1.13
3	99	Φ1.70
4	55	Φ2.27
5	35	Φ2.84



h(m)	E(lx)	Φ(m)
1	938	Φ0.58
2	234	Φ1.17
3	104	Φ1.76
4	58	Φ2.35
5	37	Φ2.94



Dot06-D9





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90	< 3	3000K	12°	644Lm
	> 80		2700K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION


3000K 90Ra



h(m)	E(lx)	Φ(m)
1	6845	Φ0.17
2	1661	Φ0.34
3	738	Φ0.51
4	415	Φ0.68
5	265	Φ0.85



h(m)	E(lx)	Φ(m)
1	1947	Φ0.55
2	486	Φ1.11
3	216	Φ1.67
4	121	Φ2.22
5	77	Φ2.78



h(m)	E(lx)	Φ(m)
1	1999	Φ0.58
2	499	Φ1.16
3	222	Φ1.75
4	124	Φ2.33
5	79	Φ2.92

STANDARD CURVY | Linear series




Linear16-D9




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	485Lm

■ Sandy Black □ Sandy White



LIGHT DISTRIBUTION
3000K 90Ra

Diffuse





h(m)	E(lx)	Φ(m)
1	182	Φ2.56
2	45	Φ5.12
3	20	Φ7.68
4	11	Φ10.24
5	7	Φ12.80

ACCESSORIES

Recessed kit-R

■ Sandy Black □ Sandy White

Recessed kit for full curvy track



MINI CURVY | Circle Track series



Curvy Full-D10-s





Power

Install

200W max

Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

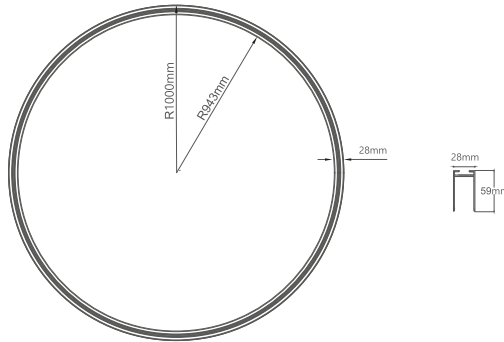

Curvy 1/2-D10-s





Power

Install

200W max

Surface/Pendant/Recessed

■ Sandy Black ■ Sandy White ■ Golden ■ Black bronze

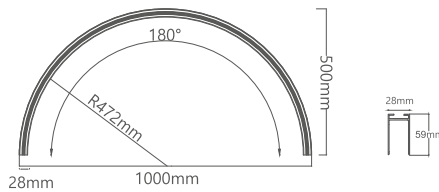

MINI CURVY | Circle Track series





Curvy 1/4-D10-s



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black
 Sandy White
 Golden
 Black bronze





Curvy 1/8-D10-s



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black
 Sandy White
 Golden
 Black bronze



MINI CURVY | Curvy Full series





Curvy Full-D06-s



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black □ Sandy White ■ Golden ■ Black bronze

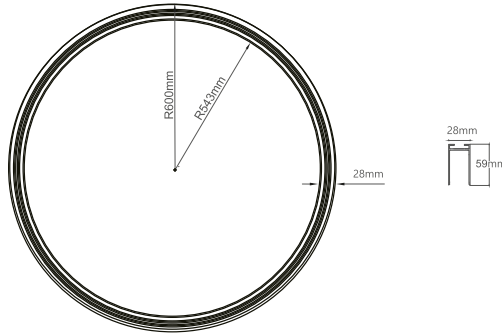



Curvy 1/2-D06-s



Power Install

200W max Surface/Pendant/Recessed

■ Sandy Black □ Sandy White ■ Golden ■ Black bronze

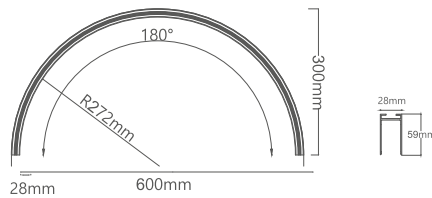

MINI CURVY | Curvy Full series





Curvy 1/4-D06-s



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black
 Sandy White
 Golden
 Black bronze





Curvy 1/8-D06-s



Power	Install
200W max	Surface/Pendant/Recessed

Sandy Black
 Sandy White
 Golden
 Black bronze



MINI CURVY | Dot series




Dot06-D10-s



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 90 > 80	< 3	3000K 2700K 4000K	Diffuse	565Lm


■ Sandy Black □ Sandy White

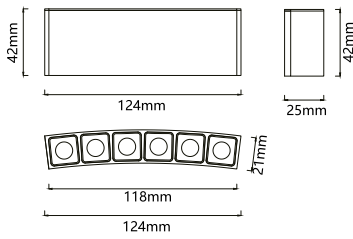

LIGHT DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(x)	Φ(m)
1	2873	Φ0.33
2	718	Φ0.67
3	319	Φ1.01
4	179	Φ1.34
5	114	Φ1.68

