

NAHHO

Using male and female connector to speed up the installation, creates continuous seamless light distribution.

With external driver, the fixture is thinner and lighter than standard T5 fixtures, making it cheaper when multiple fixtures are used.

Installation : ceiling and wall mounted.

Insulation : Class III, 24VDC.

Protection : IP20

Approval : CE, ETL


NAHHO



2 mounting methods to secure the fixture, using clips or magnetic, both methods are easy and simple.

Surface mounted installation:

The easiest and quickest way to install the fixtures, suitable for cabinet, cove lighting and DIY.

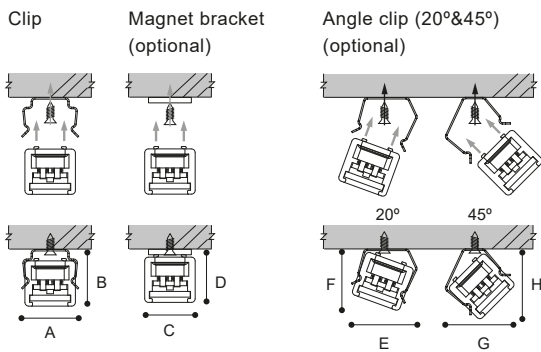

	A	B	C	D	E	F	G	H
NAHHO-SS (Flat type)	0.47" (12mm)	0.47" (12mm)	0.43" (11mm)	0.47" (12mm)	0.55" (14mm)	0.55" (14mm)	0.59" (15mm)	0.59" (15mm)
NAHHO-SS-S (Square type)	0.47" (12mm)	0.71" (18mm)	0.43" (11mm)	0.71" (18mm)	0.63" (16mm)	0.79" (20mm)	0.79" (20mm)	0.79" (20mm)
NAHHO-SS-R (Round type)	0.47" (12mm)	0.71" (18mm)	0.43" (11mm)	0.71" (18mm)	0.63" (16mm)	0.79" (20mm)	0.79" (20mm)	0.79" (20mm)